

# 5022 SD-U




## IrriStand systems

Plastic impact sprinkler, 1/2" male or 3/4" female. Mounted on IrriStand 52, 53

**Applications:** irrigation and germination of vegetables, flowers and nursery crops

- Unique hammer combined with SD (super diffuser) plate - designed for uniform distribution with single or dual nozzles
- High distribution uniformity up to 12 m
- Reduced sensitivity to clogging and higher resistance to wind
- Designed for short irrigation cycles for germination
- Color-coded bayonet nozzles for easy service
- High impact and heavy-duty plastic materials for resistance to corrosion, chemicals and radiation

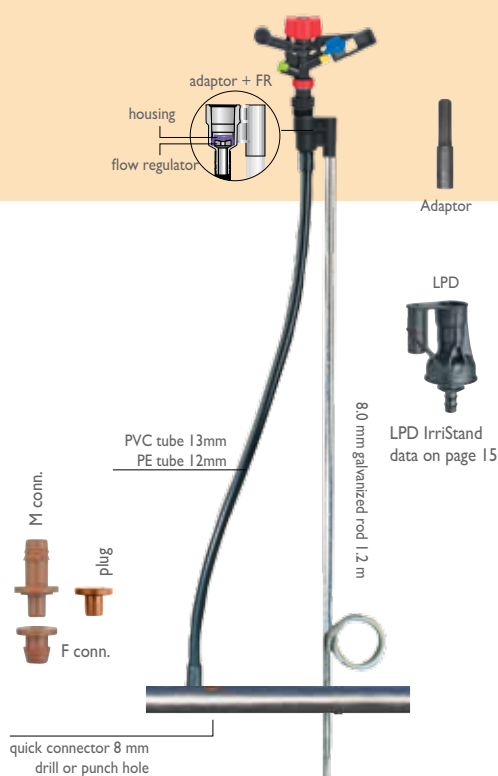

**5022 SD-U PERFORMANCE TABLE, Dual nozzle, Blue short SD**  
Precipitation rates (mm/hr) and uniformity (CU) at various spacing

Nozzle color (mm)	P (bar)	Q (m <sup>3</sup> /h)	D (m)	Spacing (m)					
				9x9	9x10	10x10	9x12	10x12	12x12
2.5x1.8 Purple	1.5	0.440	18	5.4	4.9	4.4	4.1	3.7	3.1
	2.0	0.480	19	5.9	5.3	4.8	4.4	4.0	3.3
	2.5	0.535	21	6.6	5.9	5.4	5.0	4.5	3.7
	3.0	0.590	21	7.3	6.6	5.9	5.5	4.9	4.1
	3.5	0.635	21	7.8	7.1	6.4	5.9	5.3	4.4
	4.0	0.685	21	8.5	7.6	6.9	6.3	5.7	4.8
F.R.	30-50	0.590	21.0	7.3	6.6	5.9	5.5	4.9	4.1
2.8x1.8 Orange	1.5	0.510	19	6.3	5.7	5.1	4.7	4.3	3.5
	2.0	0.560	20	6.9	6.2	5.6	5.2	4.7	3.9
	2.5	0.635	21	7.8	7.1	6.4	5.9	5.3	4.4
	3.0	0.690	22	8.5	7.7	6.9	6.4	5.8	4.8
	3.5	0.750	23	9.3	8.3	7.5	6.9	6.3	5.2
	4.0	0.800	22	9.9	8.9	8.0	7.4	6.7	5.6

Rear nozzle: 1.8 - Light Green

Color code - Distribution uniformity	CU > 92%	CU 88-92%	CU 85-88%	CU < 85%
--------------------------------------	----------	-----------	-----------	----------

- \* Performance table prepared under laboratory conditions
- \* For windy conditions use closer spacing

**5022 SD-U PERFORMANCE TABLE, Single nozzle, Blue short SD**  
Precipitation rates (mm/hr) and uniformity (CU) at various spacing

Nozzle color (mm)	P (bar)	Q (m <sup>3</sup> /h)	D (m)	Spacing (m)					
				9x9	9x10	10x10	9x12	10x12	12x12
2.5 Purple	1.5	0.310	19	3.8	3.4	3.1	2.9	2.6	2.2
	2.0	0.360	19	4.4	4.0	3.6	3.3	3.0	2.5
	2.5	0.400	20	4.9	4.4	4.0	3.7	3.3	2.8
	3.0	0.440	21	5.4	4.9	4.4	4.1	3.7	3.1
	3.5	0.475	21	5.9	5.3	4.8	4.4	4.0	3.3
	4.0	0.510	21	6.3	5.7	5.1	4.7	4.3	3.5
2.8 Orange	1.5	0.405	19	5.0	4.5	4.1	3.8	3.4	2.8
	2.0	0.475	21	5.9	5.3	4.8	4.4	4.0	3.3
	2.5	0.530	22	6.5	5.9	5.3	4.9	4.4	3.7
	3.0	0.580	22	7.2	6.4	5.8	5.4	4.8	4.0
	3.5	0.625	22	7.7	6.9	6.3	5.8	5.2	4.3
	4.0	0.670	23	8.3	7.4	6.7	6.2	5.6	4.7

Color code - Distribution uniformity	CU > 92%	CU 88-92%	CU 85-88%	CU < 85%
--------------------------------------	----------	-----------	-----------	----------

For single nozzle or dual nozzle sprinkler be sure using the recommended SD unit (appears above performance table)